


1300S Series

RoHS Compliant


- 2 Member
- 3/4 travel

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M2.6 burring tap,
 $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

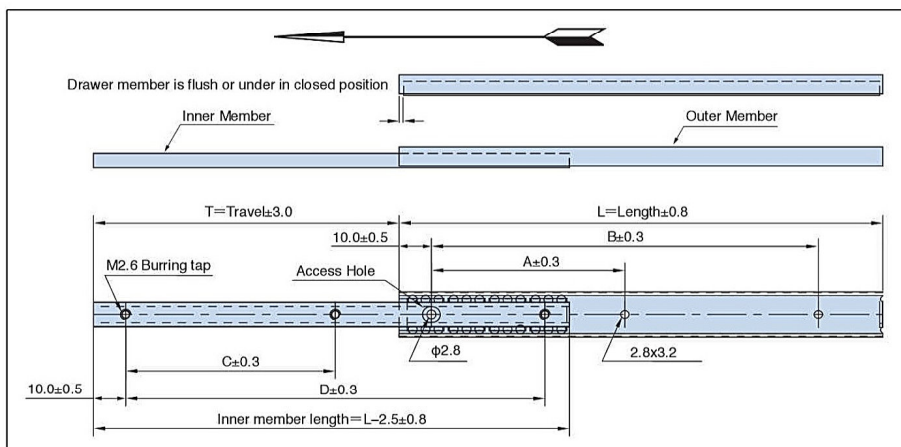

PART No.	Length L	Travel T	1300S Series Mounting Holes (mm)				Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D		
1300S-70	70	40.1	—	50	—	50	0.020	22 (10)
1300S-100	100	70.1	40	70	40	80	0.029	22 (10)
1300S-125	125	82.4	50	95	50	105	0.035	22 (10)
1300S-150	150	94.7	60	120	65	130	0.040	22 (10)


1400S Series

RoHS Compliant


- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 12.8mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

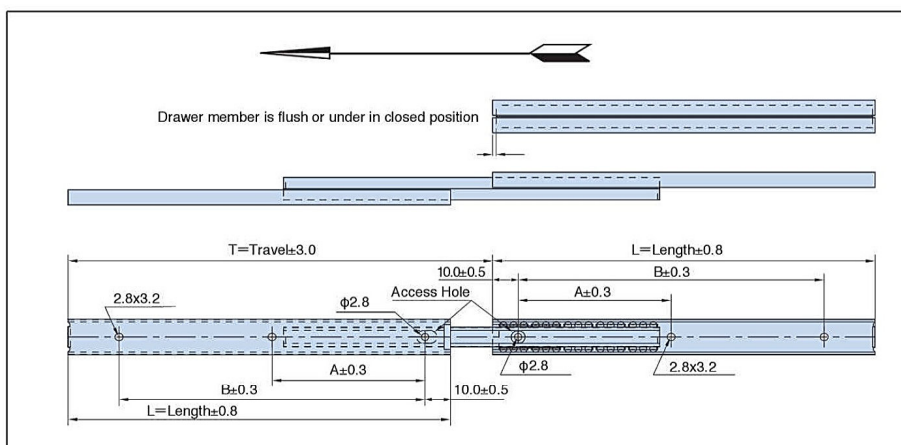

PART No.	Length L	Travel T	1400S Series Mounting Holes (mm)		Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B		
1400S-70	70	82.7	—	50	0.040	22 (10)
1400S-100	100	117.3	40	70	0.055	22 (10)
1400S-125	125	141.9	50	95	0.069	22 (10)
1400S-150	150	166.5	60	120	0.082	22 (10)


1390S Series

RoHS Compliant


- 2 Member
- Linear Motion

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Mounting hole / M2.6 burring tap
 $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

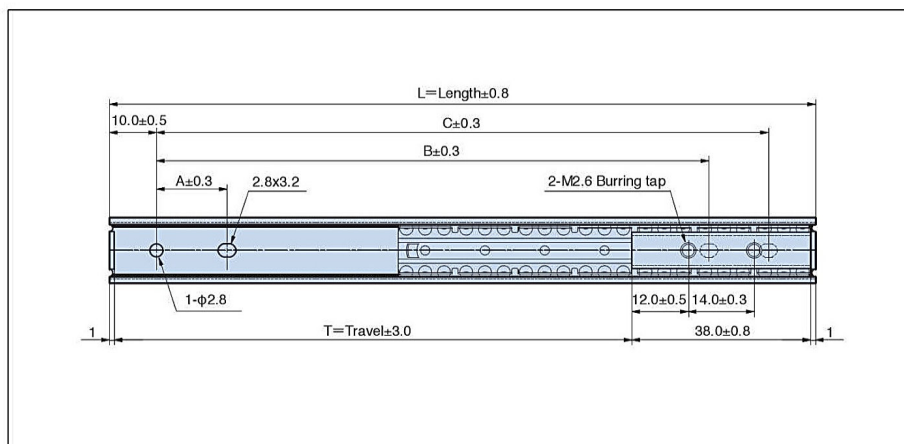

PART No.	Length L	Travel T	1390S Series Mounting Holes (mm)			Slide weight (kg/pc)
			A	B	C	
1390S-70	70	30	—	—	50	0.020
1390S-100	100	60	15	65	80	0.025
1390S-125	125	85	15	90	105	0.030
1390S-150	150	110	15	115	130	0.035


1395S Series

RoHS Compliant


- 2 Member
- Front / Rear Travel

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M2.6 burring tap
 $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

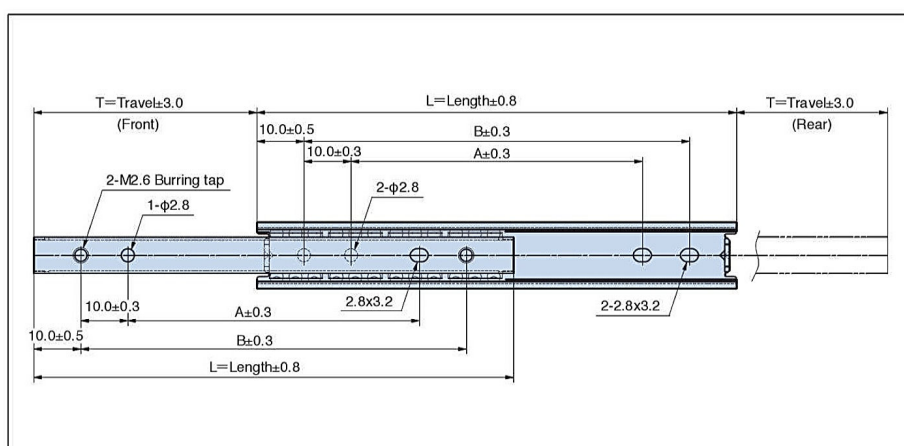

PART No.	Length L	Travel T	1395S Series Mounting Holes (mm)		Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B		
1395S-70	70	17.2	30	50	0.020	22 (10)
1395S-100	100	21.8	60	80	0.030	22 (10)
1395S-125	125	34.1	85	105	0.035	22 (10)
1395S-150	150	59.1	110	130	0.045	22 (10)


1500S Series

RoHS Compliant


- 2 Member
- 3/4 travel

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M3 burring tap
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

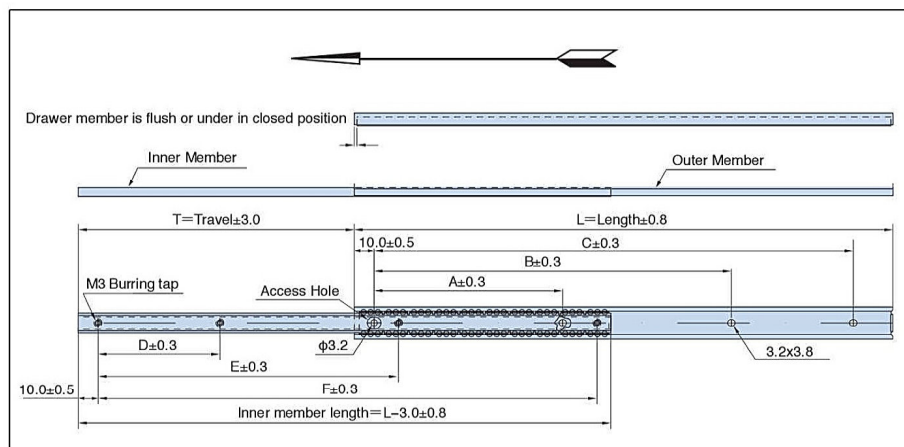

PART No.	Length L	Travel T	1500S Series Mounting Holes (mm)						Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F		
1500S-70	70	39.3	—	—	50	—	—	50	0.027	22 (10)
1500S-100	100	69.3	—	40	70	40	—	80	0.037	22 (10)
1500S-125	125	81.6	—	50	95	50	—	105	0.046	22 (10)
1500S-150	150	93.9	—	60	120	65	—	130	0.057	22 (10)
1500S-200	200	118.5	—	95	170	90	—	180	0.076	22 (10)
1500S-250	250	143.1	80	150	220	80	160	230	0.095	22 (10)
1500S-300	300	167.7	95	180	270	90	180	280	0.115	22 (10)


1600S Series

RoHS Compliant


- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 15.0mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

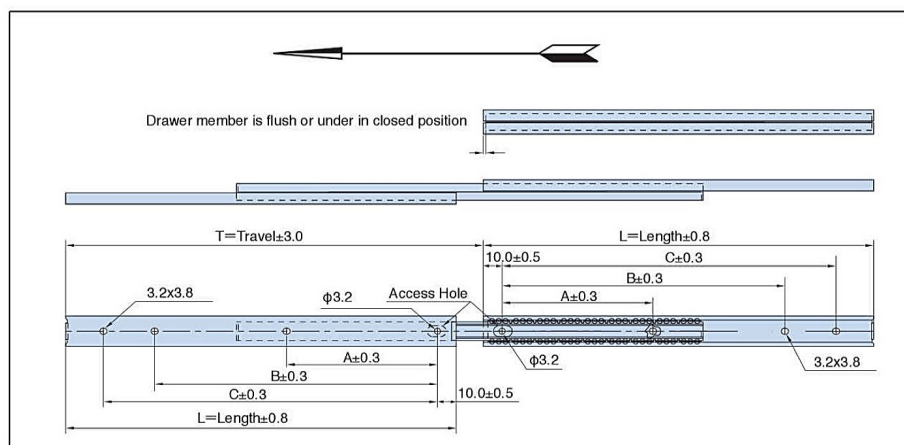

PART No.	Length L	Travel T	1600S Series Mounting Holes (mm)			Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C		
1600S-70	70	80.6	—	—	50	0.027	22 (10)
1600S-100	100	115.2	—	40	70	0.037	22 (10)
1600S-125	125	139.8	—	50	95	0.046	22 (10)
1600S-150	150	164.4	—	60	120	0.057	22 (10)
1600S-200	200	213.6	—	95	170	0.076	22 (10)
1600S-250	250	262.8	80	150	220	0.095	22 (10)
1600S-300	300	300	95	180	270	0.115	22 (10)




1530 Series

RoHS Compliant

- 2 Member
- 3/4 travel

Specification

- Material / Aluminum alloy
- Finish / Anodizing
- Slide space / 6.0mm, Height / 15.0mm
- Load rating / 8.8~9.9lbs. (4.0~4.5kg)
- Mounting hole / M2.5 • p0.45, $\phi 2.8 \times 3.2$
- Common in L / R

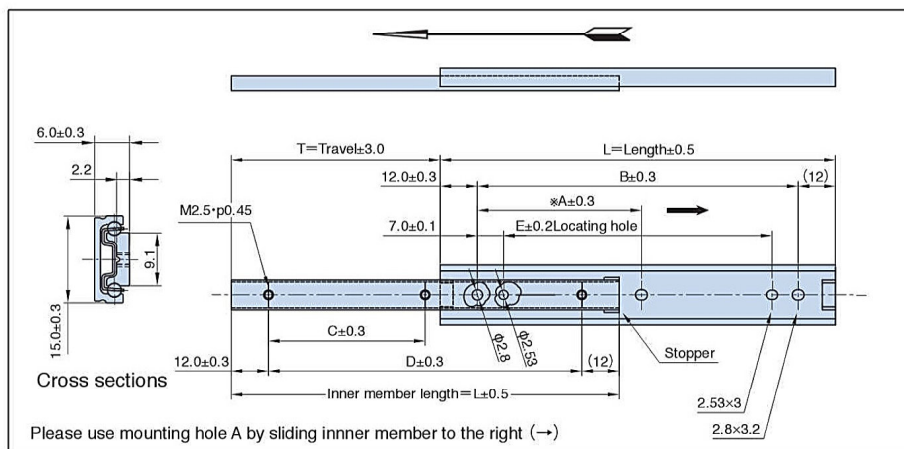

PART No.	Length L	Travel T	1530 Series Mounting holes (mm)					Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E			
1530-70	70	34	—	46	—	46	32	0.0100	—	8.8(4.0)
1530-100	100	44	38	76	38	76	62	0.0150	—	9.9(4.5)
1530-150	150	74	63	126	63	126	112	0.0225	—	8.8(4.0)


1540 Series

RoHS Compliant

- 3 Member

Specification

- Material / Aluminum alloy
- Finish / Anodizing
- Slide space / 11.0mm, Height / 15.0mm
- Load rating / 8.3~9.5lbs. (3.8~4.3kg)
- Mounting hole / $\phi 2.8$, 2.8x3.2
- Common in L / R

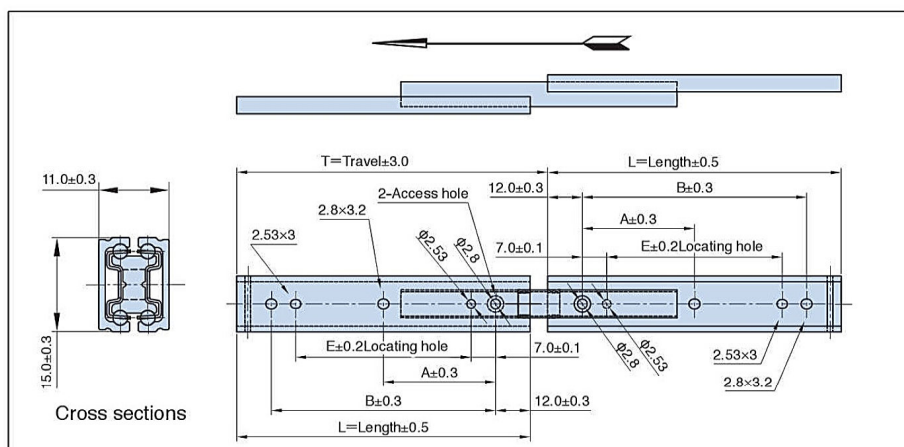

PART No.	Length L	Travel T	1540 Series Mounting holes (mm)					Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	E					
1540-80	80	78	—	56	42	—	—	0.0200	—	8.8(4.0)
1540-100	100	98	38	76	62	—	—	0.0255	—	9.5(4.3)
1540-150	150	158	63	126	112	—	—	0.0390	—	8.3(3.8)


1590S Series

RoHS Compliant


- 2 Member
- Linear Motion

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Mounting hole / M3 burring tap,
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

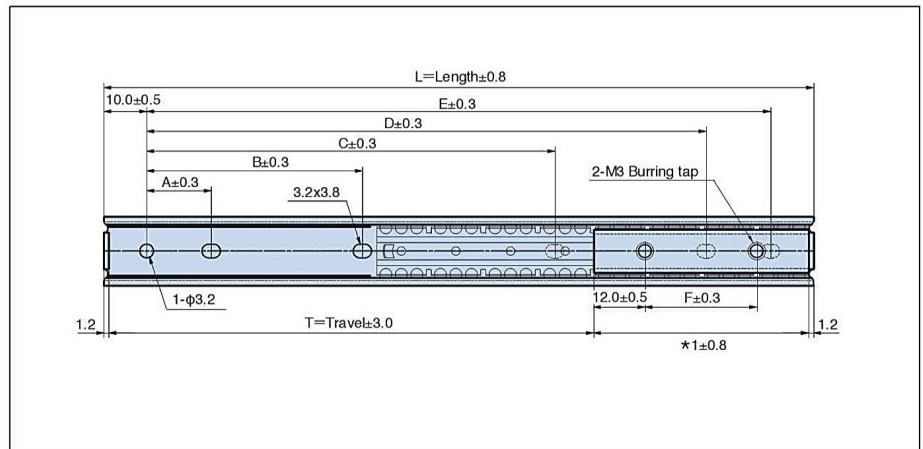

PART No.	Length L	Travel T	1590S Series Mounting Holes (mm)							Slide weight (kg/pc)
			*1	A	B	C	D	E	F	
1590S-70	70	29.6	38	—	—	—	—	50	14	0.025
1590S-100	100	59.6	38	15	—	—	65	80	14	0.030
1590S-125	125	84.6	38	15	—	—	90	105	14	0.040
1590S-150	150	109.6	38	15	—	—	115	130	14	0.045
1590S-200	200	147.6	50	15	—	—	165	180	26	0.060
1590S-300	300	247.6	50	15	90	190	265	280	26	0.080
1590S-400	400	347.6	50	15	130	250	365	380	26	0.105


1595S Series

RoHS Compliant


- 2 Member
- Front / Rear Travel
- Screw: M2.6 pan head screw

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M3 burring tap,
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

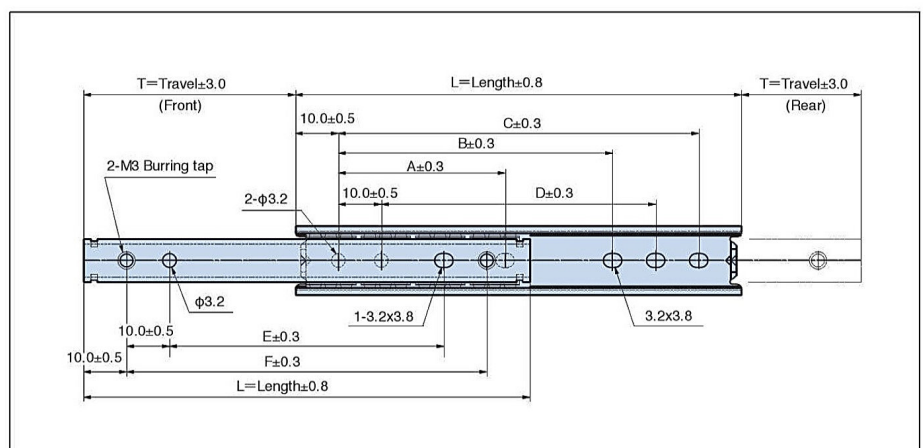

PART No.	Length L	Travel T	1595S Series Mounting Holes (mm)						Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F		
1595S-70	70	15.4	—	—	50	30	30	50	0.03	22 (10)
1595S-100	100	20.0	—	—	80	60	60	80	0.04	22 (10)
1595S-125	125	32.3	—	—	105	85	85	105	0.05	22 (10)
1595S-150	150	44.6	—	—	130	110	110	130	0.06	22 (10)
1595S-200	200	69.2	50	130	180	160	160	180	0.08	22 (10)


2000S Series

RoHS Compliant


- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 10.5mm, Height / 20.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

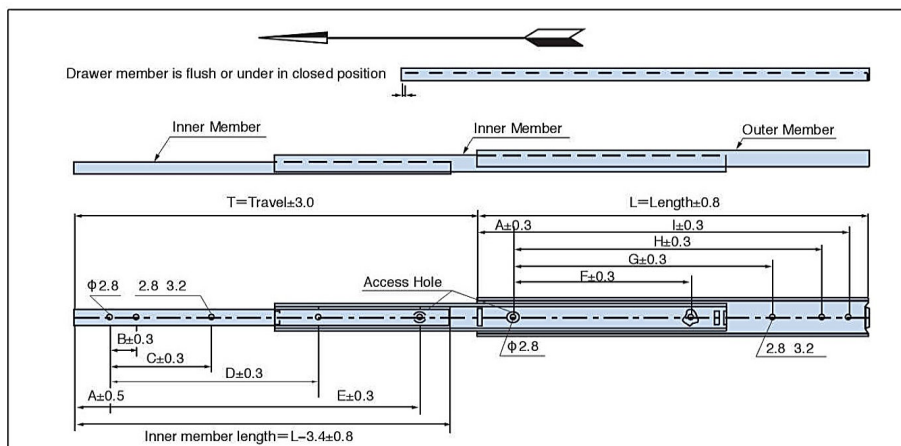

PART No.	Length L	Travel T	2000S Series Mounting Holes (mm)									Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	I		
2000S-70	70	81.0	10	—	—	—	50	—	—	50	—	0.045	22 (10)
2000S-100	100	115.6	10	—	40	—	80	—	40	80	—	0.065	22 (10)
2000S-125	125	140.2	20	—	40	—	80	—	40	80	—	0.082	22 (10)
2000S-150	150	164.8	20	—	50	—	110	—	50	110	—	0.098	22 (10)
2000S-200	200	214.0	20	15	60	—	160	—	100	145	160	0.132	22 (10)
2000S-250	250	263.2	20	15	60	160	210	50	145	195	210	0.165	22 (10)
2000S-300	300	312.4	20	15	100	160	260	100	160	245	260	0.200	22 (10)


[CAUTION] Length of Screw

Our microrails have extruded screw holes in order for customer to be able to assemble slide rail from one side (except for full extension types: 2000S, 1400S, 1600S).

If long screws were to be used, it would interfere with retainer or slide rail stopper, and it may cause damage.

Please make sure the length of screw before use. Recommended length of screw could be determined as following calculation.

Recommended length of screw (L) = (t) + (A) + (1~1.5) mm

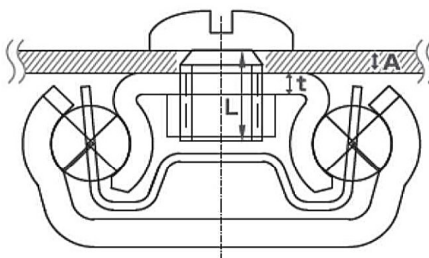

● Length of screw (L)

● Thickness of inner member (t)
1300S, 1400S: t=0.8mm
1500S, 1600S: t=1.0mm

● Thickness of object such as drawer (A)


1700 Series

RoHS Compliant

- 2 Member
- 3/4 travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 8.0mm, Height / 20.0mm
- Load rating / 33lbs. (15kg)
- Mounting hole / $\phi 3.2$, 3.2 $\times$ 3.8
- Common in L / R

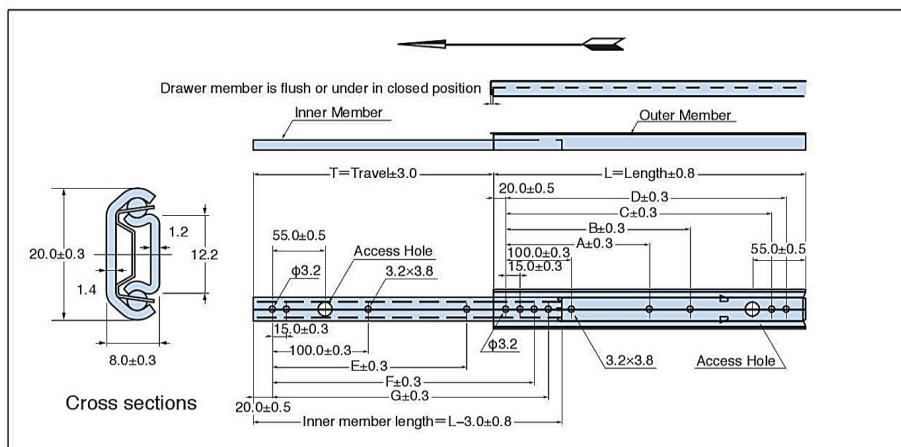

PART No.	Length L	Travel T	1700 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
1700-200	200	134	-	-	145	160	-	145	160	0.10	72	33(15)
1700-250	250	184	-	-	195	210	150	195	210	0.13	72	33(15)
1700-300	300	224	-	160	245	260	190	245	260	0.15	72	33(15)
1700-350	350	254	-	210	295	310	225	295	310	0.18	72	33(15)
1700-400	400	294	-	260	345	360	265	345	360	0.20	72	33(15)
1700-450	450	334	205	310	395	410	300	395	410	0.23	72	33(15)
1700-500	500	384	230	360	445	460	337	445	460	0.25	72	33(15)


1800 Series

RoHS Compliant

- 3 Member
- 29mm, 19mm Over travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 20.0mm
- Load rating / 33lbs. (15kg)
- Mounting hole / $\phi 3.2$, 3.2 $\times$ 3.8
- Common in L / R

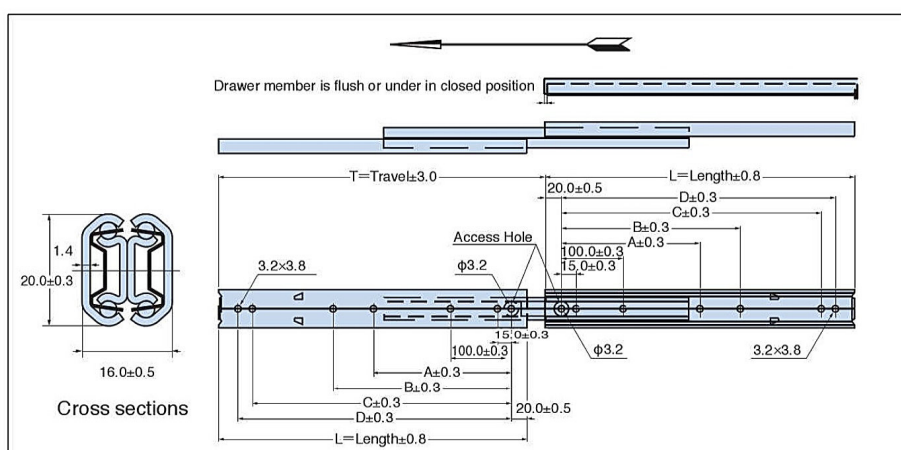

PART No.	Length L	Travel T	1800 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
1800-200	200	229	-	-	145	160	-	-	-	0.20	36	33(15)
1800-250	250	269	-	-	195	210	-	-	-	0.26	36	33(15)
1800-300	300	329	-	160	245	260	-	-	-	0.32	36	33(15)
1800-350	350	369	-	210	295	310	-	-	-	0.37	36	33(15)
1800-400	400	429	-	260	345	360	-	-	-	0.42	36	33(15)
1800-450	450	469	205	310	395	410	-	-	-	0.47	36	33(15)
1800-500	500	529	230	360	445	460	-	-	-	0.52	36	33(15)


5500 Series

RoHS Compliant

- 3 Member
- Over travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 54.8mm
- Load rating / 159~220lbs. (72~100kg)
- Mounting hole / $\phi 4.5$, 4.5×5.3
- Common in L / R

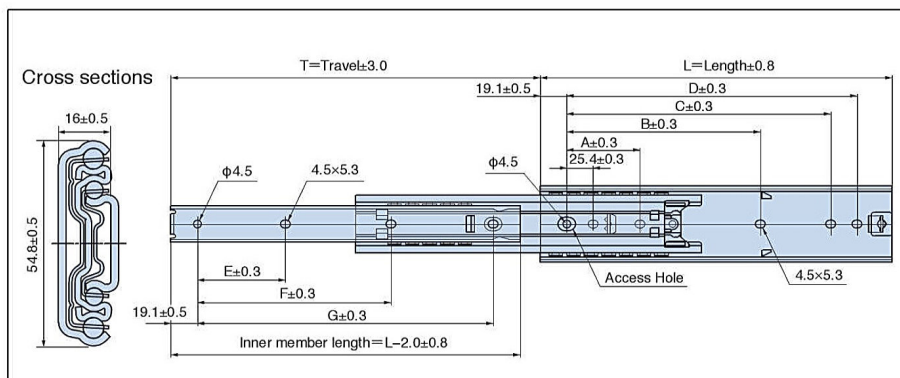

PART No.	Length L	Travel T	5500 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
5500-12	304.8 (12")	330 (13")	76.2	190.5	241.3	260.3	76.2	177.8	258.3	0.84	15	159(72)
5500-14	355.6 (14")	381 (15")	88.9	215.9	292.1	311.1	101.6	203.2	309.1	0.99	15	170(77)
5500-16	406.4 (16")	432 (17")	127.0	241.3	342.9	361.9	127.0	228.6	359.9	1.13	15	183(83)
5500-18	457.2 (18")	483 (19")	127.0	292.1	393.7	412.7	127.0	279.4	410.7	1.28	15	200(91)
5500-20	508.0 (20")	533 (21")	152.4	317.5	444.5	463.5	152.4	304.8	461.5	1.43	15	216(98)
5500-22	558.8 (22")	584 (23")	177.8	342.9	495.3	514.3	177.8	330.2	512.3	1.58	15	220(100)
5500-24	609.6 (24")	635 (25")	177.8	393.7	546.1	565.1	177.8	381.0	563.1	1.73	15	216(98)
5500-26	660.4 (26")	686 (27")	203.2	419.1	596.9	615.9	203.2	406.4	613.9	1.88	15	216(98)

5800 Series


RoHS Compliant

- 3 Member
- 1" Over travel
- With Sequential motion (in front direction)

Long size available

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 63.0mm
- Load rating / 177~298lbs. (80~135kg)
- Mounting hole / $\phi 5.3$, 5.5×6.3
- Common in L / R

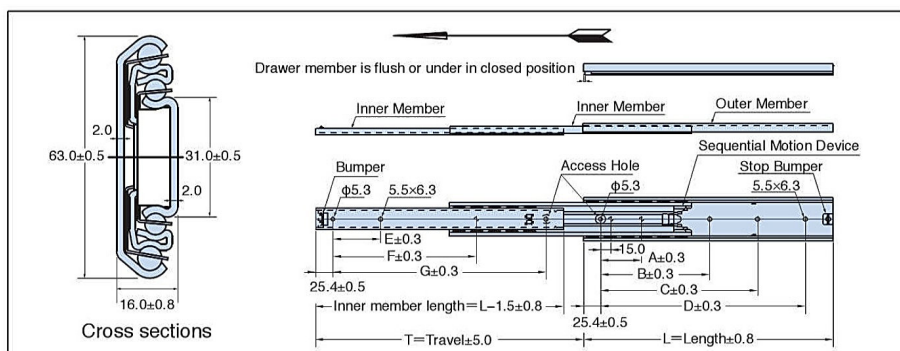

PART No.	Length L	Travel T	5800 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
5800-12	304.8 (12")	331.0 (13")	127.0	-	-	254.0	84.6	169.4	254.0	0.97	12	177(80)
5800-14	355.6 (14")	381.0 (15")	152.4	-	-	304.8	101.6	203.2	304.8	1.1	12	199(90)
5800-16	406.4 (16")	432.0 (17")	88.9	177.8	266.7	355.6	118.6	237.0	355.6	1.36	12	241(109)
5800-18	457.2 (18")	483.0 (19")	101.6	203.2	304.8	406.4	135.4	271.0	406.4	1.50	12	254(115)
5800-20	508.0 (20")	534.0 (21")	114.3	228.6	342.9	457.2	152.4	304.8	457.2	1.67	12	276(125)
5800-22	558.8 (22")	585.0 (23")	127.0	254.0	381.0	508.0	169.4	338.6	508.0	1.84	12	276(125)
5800-24	609.6 (24")	635.0 (25")	139.7	279.4	419.1	558.8	186.2	372.6	558.8	2.00	6	276(125)
5800-26	660.4 (26")	686.0 (27")	152.4	304.8	457.2	609.6	203.2	406.4	609.6	2.21	6	298(135)
5800-28	711.2 (28")	737.0 (29")	165.1	330.2	495.3	660.4	220.2	440.2	660.4	2.33	6	276(125)
5800-30	762.0 (30")	788.0 (31")	177.8	355.6	533.4	711.2	237.0	474.2	711.2	2.36	6	221(100)


250 Series

RoHS Compliant

- 3 Member
- 1" Over travel
- C Lock (Option)
- With Sequential motion in front direction (Option)

Specification

- Material / High tensile strength aluminium
- Finish / Rigid alumite treatment
- Slide space / 19.0mm, Height / 70.0mm
- Load rating / 188~260lbs. (85~118kg)
- Mounting hole / $\phi 5.3 \times \phi 10.6 \times 90^\circ$ Counter sink
- Common in L / R

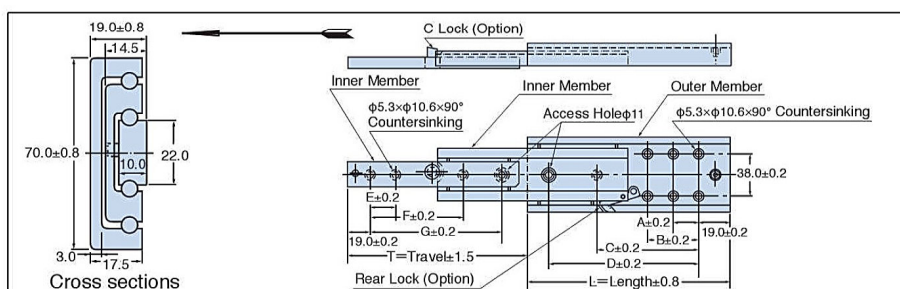

PART No.	Length L	Travel T	250 Series Mounting holes (mm)							Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	
250-12	304.8(12")	330.2(13")	98.0	-	-	254.0	50.8	177.8	254.0	230 (104)
250-14	355.6(14")	381.0(15")	127.0	-	-	304.8	76.2	203.2	304.8	234 (106)
250-16	406.4(16")	431.8(17")	76.2	152.4	254.0	355.6	101.6	228.6	355.6	243 (110)
250-18	457.2(18")	482.6(19")	76.2	152.4	279.4	406.4	127.0	279.4	406.4	254 (115)
250-20	508.0(20")	533.4(21")	98.0	203.2	330.2	457.2	152.4	304.8	457.2	260 (118)
250-22	558.8(22")	584.2(23")	98.0	203.2	355.6	508.0	177.8	330.2	508.0	260 (118)
250-24	609.6(24")	635.0(25")	127.0	254.0	406.4	558.8	177.8	381.0	558.8	256 (116)
250-26	660.4(26")	685.8(27")	127.0	254.0	431.8	609.6	203.2	406.4	609.6	238 (108)
250-28	711.2(28")	736.6(29")	152.4	304.8	482.6	660.4	228.6	431.8	660.4	221(100)
250-30	762.0(30")	787.4(31")	152.4	304.8	508.0	711.2	228.6	482.6	711.2	208 (94)
250-32	812.8(32")	838.2(33")	177.8	355.6	558.8	762.0	254.0	508.0	762.0	199 (90)
250-34	863.6(34")	889.0(35")	177.8	355.6	584.2	812.8	279.4	533.4	812.8	192 (87)
250-36	914.4(36")	939.8(37")	203.2	406.4	635.0	863.6	279.4	584.2	863.6	188 (85)


350 Series

RoHS Compliant

- 3 Member
- 1" Over travel
- E Lock (Option)
- With Sequential motion in front direction (Option)

Specification

- Material / High tensile strength aluminium
- Finish / Rigid alumite treatment
- Slide space / 25.4mm, Height / 89.0mm
- Load rating / 331~375lbs. (150~170kg)
- Mounting hole / $\phi 5.3 \times \phi 10.6 \times 90^\circ$ Counter sink
- Common in L / R

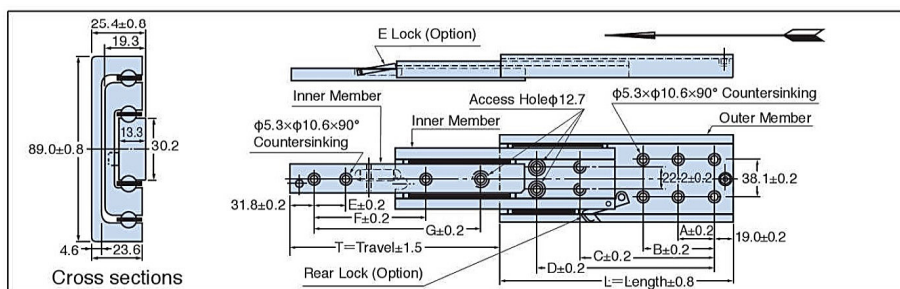

PART No.	Length L	Travel T	350 Series Mounting holes (mm)							Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	
350-12	304.8(12")	279.4(11")	101.6	-	-	254.0	-	127.0	228.6	342 (155)
350-14	355.6(14")	330.2(13")	127.0	-	-	304.8	76.2	177.8	279.4	353 (160)
350-16	406.4(16")	381.0(15")	76.2	152.4	254.0	355.6	101.6	203.2	330.2	364 (165)
350-18	457.2(18")	431.8(17")	76.2	152.4	279.4	406.4	127.0	254.0	381.0	371 (168)
350-20	508.0(20")	482.6(19")	101.6	203.2	330.2	457.2	127.0	279.4	431.8	375 (170)
350-22	558.8(22")	533.4(21")	101.6	203.2	355.6	508.0	152.4	304.8	482.6	375 (170)
350-24	609.6(24")	584.2(23")	127.0	254.0	406.4	558.8	177.8	355.6	533.4	371 (168)
350-26	660.4(26")	635.0(25")	127.0	254.0	431.8	609.6	177.8	381.0	584.2	364 (165)
350-28	711.2(28")	685.8(27")	152.4	304.8	482.6	660.4	203.2	406.4	635.0	353 (160)
350-30	762.0(30")	736.6(29")	152.4	304.8	508.0	711.2	228.6	457.2	685.8	349 (158)
350-32	812.8(32")	787.4(31")	177.8	355.6	558.8	762.0	228.6	482.6	736.6	344 (156)
350-34	863.6(34")	838.2(33")	177.8	355.6	584.2	812.8	254.0	508.0	787.4	340 (154)
350-36	914.4(36")	889.0(35")	203.2	406.4	635.0	863.6	279.4	558.8	838.2	331 (150)